
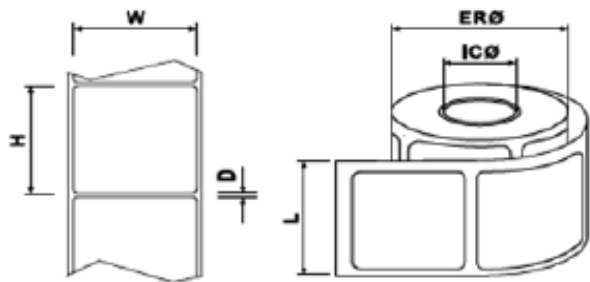


# Label Specification

2933 EP Clear 4KR

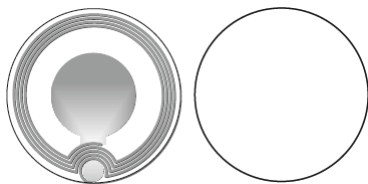

Product Description	2933 EP AA 4KR 76/xx Tamper Tag
Part No:	10104215
Label Dimensions (WxH):	33mm round (1.29")
Distance between labels (D):	2.29mm (0.09")
Linear Width (L):	35 (1.38")
External Roll Diameter (ER):	220mm (6.9")
Inner Core Diameter (IC):	76mm (3")
Face Sheet:	Clear PET
Adhesive:	Permanent Adhesive
Labels per roll:	4,000
Labels per case:	20,000
Weight roll:	0.91kg (2.0 lbs)
Weight case:	4.54kg (10 lbs)
Frequency (MHz) $\pm$ 5%:	8.2 Mhz
Electrostatic Discharge Tolerance (ESD):	2.5 kv (minimum)
*Minimal Order Quantity (MOQ)	4,000 (1 Roll)

**Storage conditions:** Keep dry but do not expose to direct sunlight • Recommended storage temperature: 18 to 29°C Maximum temperature should not exceed 43°C • Maximum shelf life of RF labels when stored in recommended conditions in 2 years\*\*

• Cases should never be stacked more than 5 high.

\* Unless otherwise specified in contractual conditions

\*\* RF circuits have no expiry date; however the adhesive has a useful working life of 2 years from the date of manufacture

For any questions regarding this or any other labelling process contact your local Checkpoint representative.